
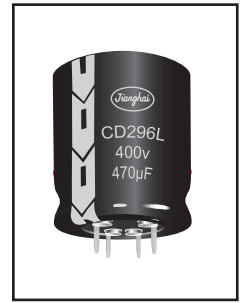


3000h at 105°C

- Long Life at High Temperature
- High Ripple Current
- Suit for high frequency regenerative voltage for AC servomotor, general inverter.




SNAP-IN/LUG

Items	Characteristics		
Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105	
Voltage Range (V)	350 ~ 420	450 ~ 500	
Capacitance Range (µF)	390 ~ 3300		
Capacitance Tolerance (20°C, 120Hz)	± 20%		
Leakage Current (µA)	After 5 minutes at 20°C application of rated voltage, leakage current is not more than 0.01CV or 1.5mA, whichever is smaller. C: Nominal Capacitance (µF) V: Rated Voltage (V)		
Dissipation Factor (20°C, 120Hz)	WV (V)	350~500	
	Tan δ	0.15	
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	350~420	450~500
	$Z_{-25°C} / Z_{+20°C}$	4	7
	$Z_{-40°C} / Z_{+20°C}$	7	-

	Useful Life		Load Life	Endurance Test	Shelf Life
Lifetime	6000h	>200000h	3000h	4000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U_R I_R 105°C	U_R $1.2 \times I_R$ 40°C	U_R I_R 105°C	U_R $I_R = 0$ 105°C	$U_R = 0$ $I_R = 0$ 105°C After test: U_R to be applied for 30min >24h before measurement

Dimensions

mm

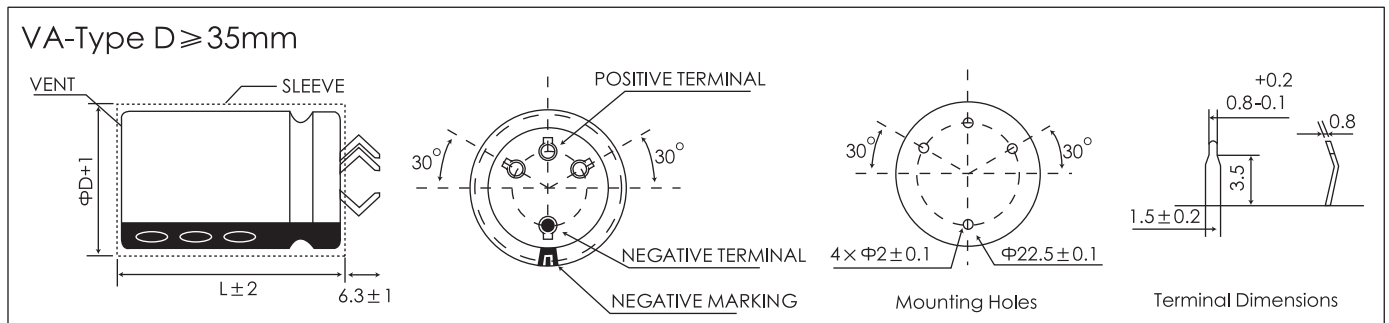

Frequency Coefficient

Frequency	50/60Hz	120Hz	300Hz	1kHz	10kHz	≥50kHz
Factor	0.8	1.0	1.16	1.3	1.41	1.43

Temperature Coefficient

Temperature(°C)	+40	+55	+70	+85	+105
Factor	3.0	2.8	2.5	2.0	1.0



CD 296L FL SERIES




Ratings for CD 296L FL Series

U _R (Surge Voltage) Code	Rated Capa- cance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 105°C, 120Hz	Size ΦD x L	P/N	
(V)	(μF)	(mΩ)	(mΩ)	(Arms)	(mm)	-	
350 (400) 2V	560	355	178	2.30	30×55	ECS2VFL561M□□300055	
		355	178	2.33	35×40	ECS2VFL561M□□350040	
	680	293	146	2.73	35×50	ECS2VFL681M□□350050	
		293	146	2.68	40×40	ECS2VFL681M□□400040	
	820	243	121	2.99	35×60	ECS2VFL821M□□350060	
		243	121	3.05	40×45	ECS2VFL821M□□400045	
		243	121	2.85	45×40	ECS2VFL821M□□450040	
	1000	199	100	3.50	35×65	ECS2VFL102M□□350065	
		199	100	3.37	40×55	ECS2VFL102M□□400055	
		199	100	3.06	45×45	ECS2VFL102M□□450045	
	1200	166	83	3.81	35×75	ECS2VFL122M□□350075	
		166	83	3.81	40×65	ECS2VFL122M□□400065	
		166	83	3.47	45×50	ECS2VFL122M□□450050	
	1500	133	66	4.62	40×80	ECS2VFL152M□□400080	
		133	66	4.27	45×65	ECS2VFL152M□□450065	
		111	55	5.43	40×95	ECS2VFL182M□□400095	
	1800	111	55	5.10	45×75	ECS2VFL182M□□450075	
		90	45	5.86	45×90	ECS2VFL222M□□450090	
	2200	90	45	5.86	50×75	ECS2VFL222M□□500075	
		74	37	6.77	45×100	ECS2VFL272M□□450100	
	2700	74	37	6.77	50×90	ECS2VFL272M□□500090	
		3300	60	30	6.77	50×105	ECS2VFL332M□□500105
	400 (450) 2G	470	423	169	2.11	35×45	ECS2GFL471M□□350045
			423	169	2.14	40×40	ECS2GFL471M□□400040
560		355	142	2.48	35×50	ECS2GFL561M□□350050	
		355	142	2.43	40×45	ECS2GFL561M□□400045	
		355	142	2.35	45×40	ECS2GFL561M□□450040	
680		293	117	2.73	35×60	ECS2GFL681M□□350060	
		293	117	2.78	40×50	ECS2GFL681M□□400050	
		293	117	2.59	45×40	ECS2GFL681M□□450040	
820		243	97	3.17	35×65	ECS2GFL821M□□350065	
		243	97	3.05	40×55	ECS2GFL821M□□400055	
		243	97	2.90	45×45	ECS2GFL821M□□450045	
1000		199	80	3.48	35×80	ECS2GFL102M□□350080	
		199	80	3.48	40×65	ECS2GFL102M□□400065	
		199	80	3.17	45×55	ECS2GFL102M□□450055	
1200		166	66	4.13	35×90	ECS2GFL122M□□350090	
		166	66	4.13	40×80	ECS2GFL122M□□400080	
		166	66	4.00	45×60	ECS2GFL122M□□450060	
1500		133	53	4.39	40×90	ECS2GFL152M□□400090	
		133	53	4.39	45×75	ECS2GFL152M□□450075	
		111	44	5.30	45×90	ECS2GFL182M□□450090	
1800		111	44	5.30	50×80	ECS2GFL182M□□500080	
		90	36	5.90	50×90	ECS2GFL222M□□500090	
2700		74	29	6.50	50×105	ECS2GFL272M□□500105	
		390	510	203	1.92	35×40	ECS2×FL391M□□350040
510	203		1.95	40×35	ECS2×FL391M□□400035		
470	423	169	2.27	35×45	ECS2×FL471M□□350045		
	423	169	2.23	40×40	ECS2×FL471M□□400040		
560	355	142	2.56	35×50	ECS2×FL561M□□350050		
	355	142	2.52	40×45	ECS2×FL561M□□400045		
	355	142	2.35	45×40	ECS2×FL561M□□450040		
680	293	117	2.81	35×60	ECS2×FL681M□□350060		
	293	117	2.78	40×50	ECS2×FL681M□□400050		
	293	117	2.52	45×45	ECS2×FL681M□□450045		
820	243	97	3.26	35×70	ECS2×FL821M□□350070		
	243	97	3.05	40×60	ECS2×FL821M□□400060		
	243	97	2.87	45×50	ECS2×FL821M□□450050		
1000	199	80	3.67	35×80	ECS2×FL102M□□350080		
	199	80	3.67	40×70	ECS2×FL102M□□400070		
	199	80	3.38	45×60	ECS2×FL102M□□450060		
1200	166	66	4.33	40×80	ECS2×FL122M□□400080		
	166	66	3.92	45×65	ECS2×FL122M□□450065		
	133	53	4.62	45×80	ECS2×FL152M□□450080		
1500	133	53	4.62	50×75	ECS2×FL152M□□500075		
	111	44	5.42	45×95	ECS2×FL182M□□450095		
1800	111	44	5.42	50×85	ECS2×FL182M□□500085		
	90	36	6.00	50×100	ECS2×FL222M□□500100		

U _R (Surge Voltage) Code	Rated Capa- cance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 105°C, 120Hz	Size ΦD x L	P/N
(V)	(μF)	(mΩ)	(mΩ)	(Arms)	(mm)	-
450 (500) 2W	390	510	225	2.00	35×40	ECS2WFL391M□□350040
		423	186	2.27	35×45	ECS2WFL471M□□350045
	470	423	186	2.23	40×40	ECS2WFL471M□□400040
		423	186	2.15	45×35	ECS2WFL471M□□450035
	560	355	156	2.47	35×55	ECS2WFL561M□□350055
		355	186	2.52	40×50	ECS2WFL561M□□400050
		355	186	2.35	45×40	ECS2WFL561M□□450040
	680	293	129	2.89	35×65	ECS2WFL681M□□350065
		293	129	2.78	40×60	ECS2WFL681M□□400060
		293	129	2.61	45×50	ECS2WFL681M□□450050
	820	243	107	3.24	35×75	ECS2WFL821M□□350075
		243	107	3.24	40×65	ECS2WFL821M□□400065
		243	107	3.10	45×50	ECS2WFL821M□□450050
	1000	199	88	3.77	35×90	ECS2WFL102M□□350090
		199	88	3.77	40×80	ECS2WFL102M□□400080
		199	88	3.68	45×65	ECS2WFL102M□□450065
	1200	166	73	4.43	40×95	ECS2WFL122M□□400095
		166	73	4.23	45×75	ECS2WFL122M□□450075
		166	73	4.23	50×65	ECS2WFL122M□□500065
	1500	133	58	4.84	40×100	ECS2WFL152M□□400100
		133	58	4.84	45×90	ECS2WFL152M□□450090
		133	58	4.84	50×80	ECS2WFL152M□□500080
	1800	111	49	5.30	45×105	ECS2WFL182M□□450105
		111	49	5.30	50×95	ECS2WFL182M□□500095
500 (550) 2H	390	510	225	1.80	35×50	ECS2HFL391M□□350050
		510	225	1.80	40×45	ECS2HFL391M□□400045
	470	423	186	2.00	35×55	ECS2HFL471M□□350055
		423	186	2.00	40×50	ECS2HFL471M□□400050
	560	423	186	2.00	45×40	ECS2HFL471M□□450040
		355	156	2.25	35×65	ECS2HFL561M□□350065
		355	156	2.25	40×55	ECS2HFL561M□□400055
	680	355	156	2.25	45×50	ECS2HFL561M□□450050
		293	129	2.60	35×75	ECS2HFL681M□□350075
		293	129	2.60	40×70	ECS2HFL681M□□400070
	820	293	129	2.60	45×55	ECS2HFL681M□□450055
		243	107	2.85	40×75	ECS2HFL821M□□400075
		243	107	2.85	45×60	ECS2HFL821M□□450060
	1000	199	88	3.30	40×90	ECS2HFL102M□□400090
		199	88	3.30	45×75	ECS2HFL102M□□450075
		166	73	4.00	40×100	ECS2HFL122M□□400100
	1200	166	73	4.00	45×85	ECS2HFL122M□□450085
		166	73	4.00	50×80	ECS2HFL122M□□500080
		133	58	4.45	45×100	ECS2HFL152M□□450100
	1500	133	58	4.45	50×95	ECS2HFL152M□□500095
		1800	111	49	4.85	50×105

Customer products are available on request.

Lifetime Diagram

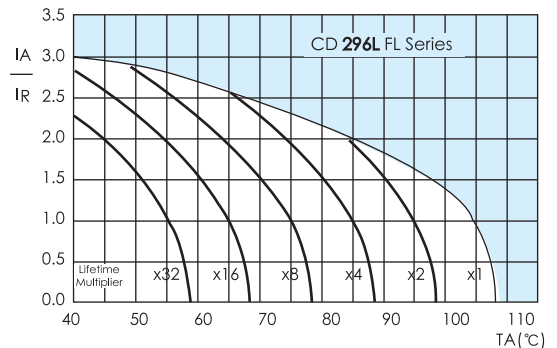

IA = actual ripple current at 120Hz, IR = rated ripple current at 120Hz, 105°C
Multiplier of Useful Life as a function of ambient temperature and ripple current load

