



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

DSA Series

- Non-solvent proof.
- Height 5mm.
- For CAR-Audio, Tuner.

• 85°C 2,000Hrs assured.



- RoHS compliant.
- Halogen-free capacitors are also available.

DZA Series

- Solvent proof.
- Height 5mm.
- Reflow Application.
- For CAR-Audio, Tuner.

• 85°C 2,000Hrs assured.

- RoHS compliant.
- Halogen-free capacitors are also available.

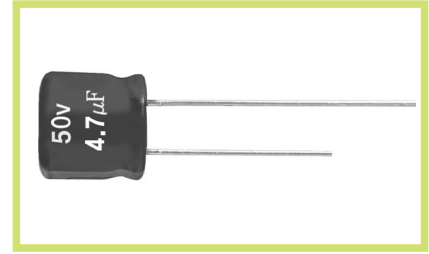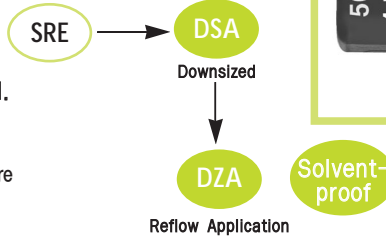

SPECIFICATIONS

Item	Characteristics																					
Rated Voltage Range	4 ~ 50 V _{DC}																					
Operating Temperature Range	- 40 ~ +85°C																					
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)																					
Leakage Current	I = 0.01CV(µA) or 3µA, whichever is greater. Where, I: Max. Leakage current(µA), C: Nominal capacitance(µF), V: Rated voltage(V _{DC}) (at 20°C, 2 minutes)																					
Dissipation Factor(Tan δ)	<table border="1"> <tr> <td>Rated Voltage(V_{DC})</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tan δ(Max.)</td> <td>0.38</td> <td>0.35</td> <td>0.32</td> <td>0.30</td> <td>0.18</td> <td>0.14</td> <td>0.12</td> </tr> </table> (at 20°C, 120Hz)	Rated Voltage(V _{DC})	4	6.3	10	16	25	35	50	Tan δ(Max.)	0.38	0.35	0.32	0.30	0.18	0.14	0.12					
Rated Voltage(V _{DC})	4	6.3	10	16	25	35	50															
Tan δ(Max.)	0.38	0.35	0.32	0.30	0.18	0.14	0.12															
Temperature Characteristics (Max. Impedance ratio)	<table border="1"> <tr> <td>Rated Voltage(V_{DC})</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35~50</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>15</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> </tr> </table> (at 120Hz)	Rated Voltage(V _{DC})	4	6.3	10	16	25	35~50	Z(-25°C)/Z(20°C)	7	4	3	2	2	2	Z(-40°C)/Z(20°C)	15	10	8	5	4	3
Rated Voltage(V _{DC})	4	6.3	10	16	25	35~50																
Z(-25°C)/Z(20°C)	7	4	3	2	2	2																
Z(-40°C)/Z(20°C)	15	10	8	5	4	3																
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C. Capacitance change ≤ ±20% of the initial value Tan δ ≤ 200% of the initial specified value Leakage current ≤ The initial specified value																					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. Capacitance change ≤ ±20% of the initial value Tan δ ≤ 200% of the initial specified value Leakage current ≤ 200% of the initial specified value																					
Others	Satisfied characteristics KS C IEC 60384-4																					

DIMENSIONS OF DSA/DZA

Unit(mm)

Marking- DSA : BLACK SLEEVE, WHITE INK
DZA : GREEN SLEEVE, BLACK INK

ø D	4	5	6.3	8
ø d	0.45	0.45	0.45	0.45
F	1.5	2.0	2.5	2.5
ø D'	ø D + 0.5 max.			
L'	L + 1.0 max.			L + 1.5 max.



RATINGS OF DSA/DZA Series

μF \ V _{DC}	4	6.3	10	16	25	35	50
1							4×5 8.6
2.2							4×5 11
3.3							4×5 14
4.7						4×5 15	4×5 17
6.8					4×5 17	4×5 18	5×5 22
10				4×5 20	4×5 21	5×5 25	5×5 27
15			4×5 22	4×5 24	5×5 28	5×5 31	6.3×5 36
22		4×5 24	4×5 27	5×5 32	5×5 35	6.3×5 40	6.3×5 45
33	4×5 23	4×5 30	5×5 35	5×5 40	6.3×5 45	6.3×5 50	8×5 61
47	4×5 28	4×5 36	5×5 43	6.3×5 50	6.3×5 59	8×5 65	
68	5×5 33	5×5 48	6.3×5 54	6.3×5 60	8×5 74		
100	5×5 48	6.3×5 60	6.3×5 72	6.3×5 77	8×5 90		
150	6.3×5 70	6.3×5 72	8×5 88				
220	6.3×5 79	8×5 93	8×5 98				
330	8×5 95	8×5 141	← Case Size ϕ D × L (mm) ← Rated Ripple Current (mA _{rms} /85°C, 120Hz)				

RECOMMENDED REFLOW SOLDERING CONDITIONS(For DZA Series)

<p>TEMPERATURE PROFILE</p>	Time of Preheat temp. (from 150°C to 200°C)	Time to be Maintained Above 217°C	Time to be Maintained Above 230°C	Peak Temp.	Reflow Cycle
	60 ~ 100 Sec	60 ~ 70 Sec	20 ~ 30 Sec	250°C (10 Sec ↓)	1 TIME